

PSX: DIRECT DRIVE


8QRS Direct Drive MULTI-SIZE

What It Is

The 8QRS PSX: Direct Drive provides a simple method for installing small diameter pipes into manholes or other structures.

The unique design of 8QRS allows it to be easily adapted to 1-1/2" to 4" (38 – 100 mm) PVC pipes, either in the plant or in the field.

The reliable tempered series 304 stainless steel power sleeve allows for easy adjustment in almost any 8" cored or cast hole for a watertight connection.

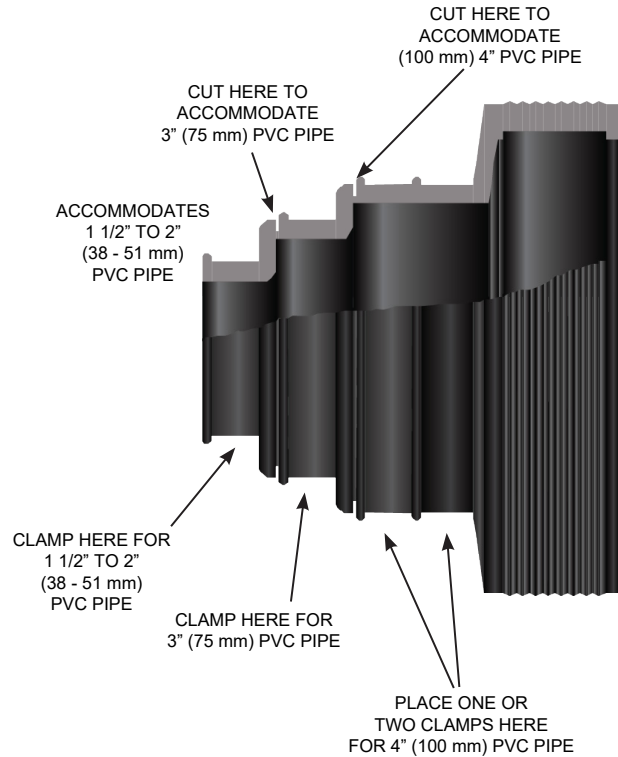

How It Works

- Sections are cut off to adapt to different PVC pipe sizes.
- The connector fits into a cast or cored hole.
- A power sleeve made from tempered series 304 stainless steel expands with a certified installation wrench.
- Take-up clamps made from series 304 stainless steel with quick adjusting screws secure the connector to the pipe.

Why It's Better

- Adaptability to a range of PVC pipe sizes all in one connector.
- Safely install the connector from the outside of the manhole.
- All stainless-steel components with no welds or rivets creating a stronger product.
- Precision molding provides accurate compensation for hole size variations.
- Contractor can save time and money by backfilling immediately.



NITRILE 

8QRS PSX: Direct Drive is available in Oil-Resistant Nitrile rubber.



Press-Seal believes all information is accurate as of its publication date. Information, specifications, and prices are all subject to change without notice. Press-Seal is not responsible for any inadvertent errors. Copyright 2022.

Phone: 800-348-7325
Fax: (260) 436-1908

PRESS-SEAL CORPORATION
Protecting Our Planet's Clean Water Supply
ISO 9001: Registered • Version 02.09.22.8.50

Email: sales @press-seal.com
Web: www.press-seal.com

PSX: DIRECT DRIVE

SELECTION GUIDE Pipe OD 1.90" - 6.90" (48mm - 175mm)

PIPE DESCRIPTION	PIPE O.D. INCH	HOLE SIZE RANGE INCH	HOLE SIZE RANGE mm	PSX: DD SIZE DESIGNATION
1.5" PVC	1.90" 48 mm	8.00 - 8.20	203- 208 mm	8 QRS "STEP S" PSX
2" PVC	2.38" 60 mm			8 QRS "STEP S" PSX
2" CI/DI	2.50" 64 mm			8 QRS "STEP S" PSX
2.25" CI/DI	2.75" 70 mm			8 QRS "STEP R" PSX
3" PVC	3.50" 89 mm			8 QRS "STEP R" PSX
3" CI/DI	3.96" 101 mm			8 QRS "STEP Q" PSX
4" (100 mm) PVC D3033 OR D3034	4.21" 107 mm			8 QRS "STEP Q" PSX
4" (100 mm) TRUSS	4.30" 109 mm			8 QRS "STEP Q" PSX
4" (100 mm) CI/DI 4" (100 mm) C900 PVC	4.80" 122 mm			8 QRS "STEP Q" PSX

Press-Seal believes all information is accurate as of its publication date. Information, specifications, and prices are all subject to change without notice. Press-Seal is not responsible for any inadvertent errors. Copyright 2022.

