

# FIBERGLASS HOLE FORMERS

Low Draft Precision Fiberglass

## What It Is

Press-Seal Fiberglass Hole Formers are designed to make precise entry holes for pipe penetrations in concrete structures. Made with fiberglass cloth (rather than chop), they include heavy wood bracing and feature a smooth, low-taper surface for easy release. Fiberglass Hole Formers are available for manholes, straight wall structures, and for offset holes in lift stations and wet wells. Sizes from 8" to 56" diameters in a variety of wall thicknesses. Also available with high-strength magnets for convenient mounting to form cores.



## Parallel Hole Formers


- Provides parallel 8" dia. or 11" dia holes (200 mm and 275 mm)
- Standard 26.25" center-to-center spacing (667 mm)
- Available for 48", 60", 72", 84" and 96" ID structures (1200, 1500, 1800, 2100, 2400 mm) such as wet wells, lift stations, pump stations, etc.

## Round Manholes

- Available in diameters from 8" to 56" (200 - 1422 mm).
- Manhole ID's of 36", 48", 60", 72", and 96" (900, 1200, 1500, 1800, 2400 mm).
- Manhole wall thicknesses of 4", 5", 6", 7", and 8" (100, 125, 150, 175, 200 mm).
- Special wall thickness is also available.

## Straight Wall Structures

- Available in diameters from 8" to 56" (200 - 1422 mm).
- 3" to 8" wall thickness (standard). (75 - 200 mm).

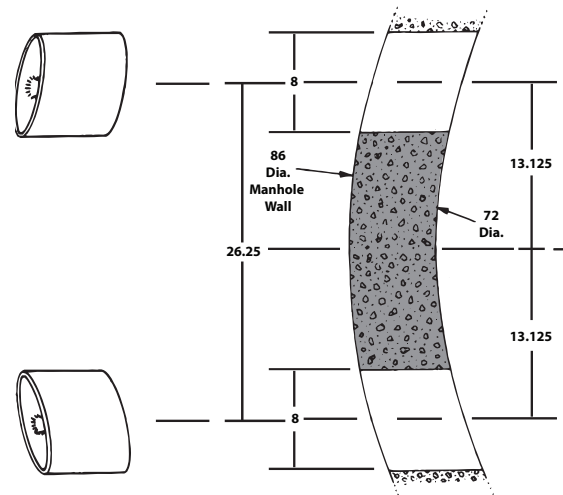

## ORDERING INFORMATION

All fiberglass hole formers can be specially ordered to use with the Magna-Former magnetic holding system



Press-Seal believes all information is accurate as of its publication date. Information, specifications, and prices are all subject to change without notice. Press-Seal is not responsible for any inadvertent errors. Copyright 2022.

Phone: 800-348-7325  
Fax: (260) 436-1908

**PRESS-SEAL CORPORATION**  
Protecting Our Planet's Clean Water Supply  
ISO 9001: Registered • Version 02.18.22.4.57

Email: sales @press-seal.com  
Web: www.press-seal.com